

QC Metallurgical, Inc.

Testing & Consulting Services

2870 Stirling Road • Hollywood, FL 33020-1199 • (954) 889-0089 • Fax (954) 362-5742

INSPECTION REPORT

DATE May 8, 2017

QCM JOB# 17EM-352 CUSTOMER Stoneline Group

DESCRIPTION 7 samples Pavers

CUSTOMER ORDER# _____ MATERIAL _____

INSPECTION SPECIFIED Coefficient of Friction

APPLICABLE SPECIFICATIONS ANSI A137.1

RESULTS OF INSPECTION

COEFFICIENT OF FRICTION TEST RESULTS:

SAMPLE A SHELL STONE

	WET			DRY		
	AVG.	MIN.	MAX	AVG.	MIN.	MAX.
1.	0.77	0.74	0.81	1. 0.72	0.66	0.76
2.	0.81	0.78	0.83	2. 0.68	0.65	0.72
3.	0.81	0.77	0.83	3. 0.64	0.61	0.66
4.	0.83	0.79	0.86	4. 0.64	0.60	0.70

SAMPLE B ICE WHITE TUMBLED

	WET			DRY		
1.	0.72	0.66	0.75	1. 0.56	0.54	0.57
2.	0.71	0.66	0.74	2. 0.60	0.54	0.62
3.	0.74	0.68	0.76	3. 0.60	0.55	0.63
4.	0.72	0.67	0.75	4. 0.59	0.57	0.60

SAMPLE C ICE WHITE SANDBLASTED

	WET			DRY		
1.	0.83	0.76	0.87	1. 0.84	0.79	0.86
2.	0.83	0.78	0.87	2. 0.81	0.79	0.85
3.	0.83	0.79	0.87	3. 0.79	0.77	0.82
4.	0.84	0.81	0.87	4. 0.79	0.75	0.82

SAMPLE D PEARL

	WET			DRY		
	AVG.	MIN.	MAX.	AVG.	MIN.	MAX.
1.	0.71	0.63	0.74	1. 0.59	0.55	0.62
2.	0.72	0.66	0.78	2. 0.57	0.55	0.61
3.	0.73	0.67	0.77	3. 0.58	0.56	0.62
4.	0.71	0.63	0.77	4. 0.56	0.53	0.60

SAMPLE E DYNA REGAL

	WET			DRY		
1.	0.78	0.73	0.84	1. 0.71	0.62	0.82
2.	0.81	0.74	0.85	2. 0.76	0.63	0.92
3.	0.83	0.73	0.89	3. 0.74	0.61	0.84
4.	0.81	0.70	0.87	4. 0.75	0.66	0.80

SAMPLE F TAHOE

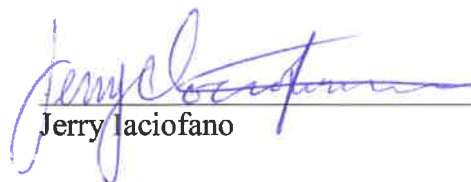
	WET			DRY		
1.	0.78	0.73	0.80	1. 0.57	0.56	0.59
2.	0.79	0.76	0.82	2. 0.59	0.58	0.62
3.	0.78	0.76	0.80	3. 0.59	0.58	0.61
4.	0.78	0.76	0.80	4. 0.59	0.58	0.61

SAMPLE G ICE WHITE SANDBLASTED BRUSHED

	WET			DRY		
1.	0.72	0.69	0.75	1. 0.77	0.73	0.81
2.	0.73	0.70	0.75	2. 0.74	0.69	0.76
3.	0.73	0.69	0.76	3. 0.77	0.74	0.80
4.	0.74	0.71	0.78	4. 0.77	0.74	0.80

SPEC: .42 Min.

ALL SAMPLES ACCEPTABLE


Jerry Iacofano